

BHTS ZZ C4 200°

Insert Bearings for High Temperature Pillow Blocks for High Temperature





Technical characteristics:

- Bearing material: steel AISI 52100 (Chrome) stabilized to the application
- Radial Clearance C4
- Shields type ZZ
- Lubricated with grease for temperatures up to 200°C
- Housing in Stainless Steel
- Pillow Blocks UCPA and UCT Series also available



Fields of application:

- Air conveyors
- Industrial Fans
- Packaging machinery
- Steel industry
- Ceramic Industry
- Papermaking industry

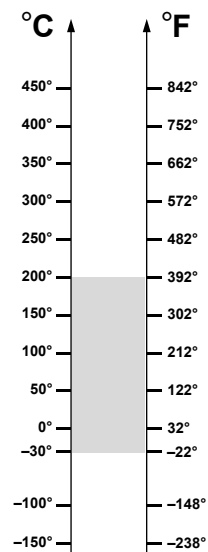

UC SERIE

| Designation | Bore (B) | Diam (D) | Speed, RPM | Static Load, kN at 200°C | Static Load, kN at 20°C | Pillow Blocks suitable Housing codes | | |
|------------------------|----------|----------|------------|--------------------------|-------------------------|--------------------------------------|-----------|----------|
| | | | | | | F Serie | FL Serie | P Serie |
| UC 201 BHTS ZZ C4 200° | 12 | 47 | 1440 | 6,00 | 6,60 | F 204 SS | FL 204 SS | P 204 SS |
| UC 202 BHTS ZZ C4 200° | 15 | 47 | 1440 | 6,00 | 6,60 | F 204 SS | FL 204 SS | P 204 SS |
| UC 203 BHTS ZZ C4 200° | 17 | 47 | 1440 | 6,00 | 6,60 | F 204 SS | FL 204 SS | P 204 SS |
| UC 204 BHTS ZZ C4 200° | 20 | 47 | 1200 | 6,00 | 6,60 | F 204 SS | FL 204 SS | P 204 SS |
| UC 205 BHTS ZZ C4 200° | 25 | 52 | 1120 | 7,09 | 7,80 | F 205 SS | FL 205 SS | P 205 SS |
| UC 206 BHTS ZZ C4 200° | 30 | 62 | 880 | 10,19 | 11,2 | F 206 SS | FL 206 SS | P 206 SS |
| UC 207 BHTS ZZ C4 200° | 35 | 72 | 760 | 13,73 | 15,1 | F 207 SS | FL 207 SS | P 207 SS |
| UC 208 BHTS ZZ C4 200° | 40 | 80 | 680 | 16,55 | 18,2 | F 208 SS | FL 208 SS | P 208 SS |
| UC 209 BHTS ZZ C4 200° | 45 | 85 | 640 | 18,73 | 20,6 | F 209 SS | FL 209 SS | P 209 SS |
| UC 210 BHTS ZZ C4 200° | 50 | 90 | 600 | 21,00 | 23,1 | F 210 SS | FL 210 SS | P 210 SS |
| UC 211 BHTS ZZ C4 200° | 55 | 100 | 536 | 26,37 | 29,0 | F 211 SS | FL 211 SS | P 211 SS |
| UC 212 BHTS ZZ C4 200° | 60 | 110 | 480 | 29,64 | 32,6 | F 212 SS | FL 212 SS | P 212 SS |
| UC 213 BHTS ZZ C4 200° | 65 | 120 | 424 | 36,19 | 39,8 | F 213 SS | - | P 213 SS |
| UC 214 BHTS ZZ C4 200° | 70 | 125 | 400 | 40,64 | 44,7 | F 214 SS | - | P 214 SS |
| UC 215 BHTS ZZ C4 200° | 75 | 130 | 384 | 44,73 | 49,2 | F 215 SS | - | P 215 SS |

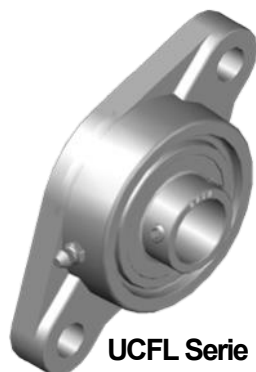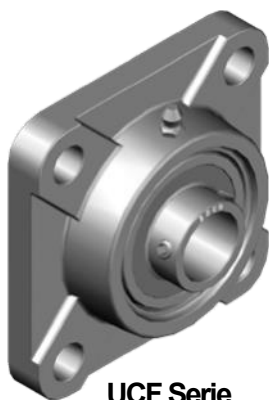

BECCO

12100 Cuneo - Italy
 phone: 0039 0171 66883
 fax: 0039 0171 648913
www.becoitalia.biz