

BHTS ZZ C4 200°

고온용 인서트베어링
고온용 필로우블록





기술적 특징 :

- 베어링소재 : 스틸 AISI 52100 (크롬)
- 내부틈새 C4
- 실드 타입 ZZ
- 200도 최대 의 그리스 윤활
- 스테인리스스틸 하우징
- 필로우블럭 UCFA, UCT 시리즈 가능



적용분야 :

- 컨베이어
- 공업용 선풍기
- 포장기계설비
- 철강제조업계
- 세라믹 산업
- 제지제조업계

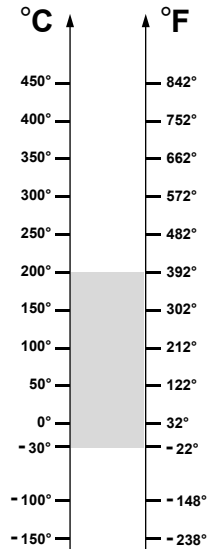

UC 시리즈

| 아이템 코드 | 내경 (B) | 외경 (D) | 제한속도 RPM | 정하중, kN 에 200°C | 정하중, kN 에 20°C | 하우징 아이템 코드 - 필로우블록 | | |
|------------------------|--------|--------|----------|-----------------|----------------|--------------------|-----------|----------|
| | | | | | | F 시리즈 | FL 시리즈 | P 시리즈 |
| UC 201 BHTS ZZ C4 200° | 12 | 47 | 1440 | 6,00 | 6,60 | F 204 SS | FL 204 SS | P 204 SS |
| UC 202 BHTS ZZ C4 200° | 15 | 47 | 1440 | 6,00 | 6,60 | F 204 SS | FL 204 SS | P 204 SS |
| UC 203 BHTS ZZ C4 200° | 17 | 47 | 1440 | 6,00 | 6,60 | F 204 SS | FL 204 SS | P 204 SS |
| UC 204 BHTS ZZ C4 200° | 20 | 47 | 1200 | 6,00 | 6,60 | F 204 SS | FL 204 SS | P 204 SS |
| UC 205 BHTS ZZ C4 200° | 25 | 52 | 1120 | 7,09 | 7,80 | F 205 SS | FL 205 SS | P 205 SS |
| UC 206 BHTS ZZ C4 200° | 30 | 62 | 880 | 10,19 | 11,2 | F 206 SS | FL 206 SS | P 206 SS |
| UC 207 BHTS ZZ C4 200° | 35 | 72 | 760 | 13,73 | 15,1 | F 207 SS | FL 207 SS | P 207 SS |
| UC 208 BHTS ZZ C4 200° | 40 | 80 | 680 | 16,55 | 18,2 | F 208 SS | FL 208 SS | P 208 SS |
| UC 209 BHTS ZZ C4 200° | 45 | 85 | 640 | 18,73 | 20,6 | F 209 SS | FL 209 SS | P 209 SS |
| UC 210 BHTS ZZ C4 200° | 50 | 90 | 600 | 21,00 | 23,1 | F 210 SS | FL 210 SS | P 210 SS |
| UC 211 BHTS ZZ C4 200° | 55 | 100 | 536 | 26,37 | 29,0 | F 211 SS | FL 211 SS | P 211 SS |
| UC 212 BHTS ZZ C4 200° | 60 | 110 | 480 | 29,64 | 32,6 | F 212 SS | FL 212 SS | P 212 SS |
| UC 213 BHTS ZZ C4 200° | 65 | 120 | 424 | 36,19 | 39,8 | F 213 SS | - | P 213 SS |
| UC 214 BHTS ZZ C4 200° | 70 | 125 | 400 | 40,64 | 44,7 | F 214 SS | - | P 214 SS |
| UC 215 BHTS ZZ C4 200° | 75 | 130 | 384 | 44,73 | 49,2 | F 215 SS | - | P 215 SS |

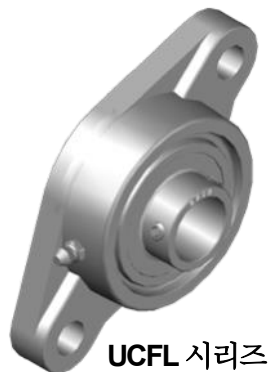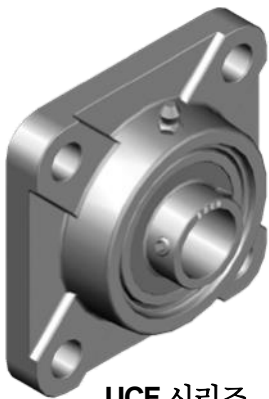

12100 Cuneo - Italy
phone: 0039 0171 66883
fax: 0039 0171 648913
www.becoitalia.biz