





BSS 2RS

Technical characteristics:

- Material tempered stainless steel
- Standard Radial Clearance
- Stainless Steel sheets type 2RS
- Grease: The bearings are supplied greased


Fields of application:

- Air conveyors for food processing plants
- Construction industry
- Windows, sliding windows, etc

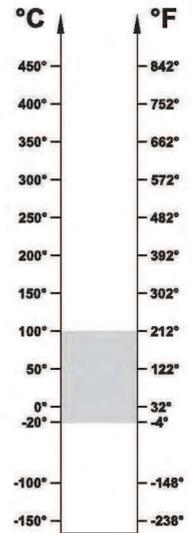

UC SERIE

Designation	Bore (B) Diam (D)		Speed Static Load, Static Load,			Pillow Block suitable		
			RPM/min	kN at 100°	kN at 20°	F Serie	FL Serie	P Serie
UC 201 BSS 2RS	12	47	1440	5,94	5,94	Housing F 201 SS	Housing FL 201 SS	Housing P 201 SS
UC 202 BSS 2RS	15	47	1440	5,94	5,94	Housing F 202 SS	Housing FL 202 SS	Housing P 202 SS
UC 203 BSS 2RS	17	47	1440	5,94	5,94	Housing F 203 SS	Housing FL 203 SS	Housing P 203 SS
UC 204 BSS 2RS	20	47	1200	5,94	5,94	Housing F 204 SS	Housing FL 204 SS	Housing P 204 SS
UC 205 BSS 2RS	25	52	1120	7	7	Housing F 205 SS	Housing FL 205 SS	Housing P 205 SS
UC 206 BSS 2RS	30	62	880	10,1	10,1	Housing F 206 SS	Housing FL 206 SS	Housing P 206 SS
UC 207 BSS 2RS	35	72	760	13,6	13,6	Housing F 207 SS	Housing FL 207 SS	Housing P 207 SS
UC 208 BSS 2RS	40	80	680	16,3	16,3	Housing F 208 SS	Housing FL 208 SS	Housing P 208 SS
UC 209 BSS 2RS	45	85	640	18,5	18,5	Housing F 209 SS	Housing FL 209 SS	Housing P 209 SS
UC 210 BSS 2RS	50	90	600	20,8	20,8	Housing F 210 SS	Housing FL 210 SS	Housing P 210 SS
UC 211 BSS 2RS	55	100	536	26,1	26,1	Housing F 211 SS	Housing FL 211 SS	Housing P 211 SS
UC 212 BSS 2RS	60	110	480	29,3	29,3	Housing F 212 SS	Housing FL 212 SS	Housing P 212 SS
UC 213 BSS 2RS	65	120	424	35,8	35,8	Housing F 213 SS	Housing FL 213 SS	Housing P 213 SS
UC 214 BSS 2RS	70	125	400	40,2	40,2	Housing F 214 SS	Housing FL 214 SS	Housing P 214 SS
UC 215 BSS 2RS	75	130	384	44,3	44,3	Housing F 215 SS	Housing FL 215 SS	Housing P 215 SS

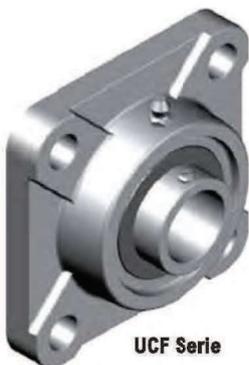

12100 Cuneo - Italy
 Via Volta, 7
 phone: 0039 0171 66883
 fax: 0039 0171 648913
 www.becoitalia.it